



High Power Output
Low LCOE



Maximum Power
450W+



TWMNH

N-type Half-cell
Bifacial Full-black Module (48)

48HC430-450W



Residential
Rooftop



15
YEAR
Materials
Warranty




30
YEAR
Power
Warranty

<https://en.tongwei.cn/>



Learn More

DRAWINGS (Unit: mm)

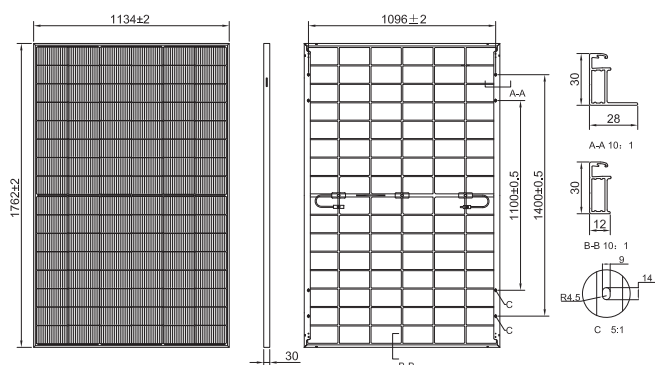

ELECTRICAL CHARACTERISTICS (STC)

Module Type: TWMNH-48HCXXX

Maximum Power: Pmax [W]	430	435	440	445	450
Open Circuit Voltage: Voc [V]	34.95	35.15	35.35	35.55	35.75
Short Circuit Current: Isc [A]	15.83	15.86	15.89	15.92	15.95
Voltage at Maximum Power: Vmp [V]	29.16	29.42	29.67	29.93	30.19
Current at Maximum Power: Imp [A]	14.75	14.79	14.83	14.87	14.91
Module Efficiency: η [%]	21.5	21.8	22.0	22.3	22.5

* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass1.5

ELECTRICAL CHARACTERISTICS (NMOT)

Maximum Power: Pmax [W]	325	329	332	336	340
Open Circuit Voltage: Voc [V]	33.27	33.46	33.65	33.84	34.03
Short Circuit Current: Isc [A]	12.78	12.80	12.83	12.85	12.88
Voltage at Maximum Power: Vmp [V]	27.29	27.56	27.74	27.98	28.24
Current at Maximum Power: Imp [A]	11.91	11.94	11.97	12.01	12.04

* NMOT: Irradiance 800W/m², Ambient Temperature 20°C, Air Mass1.5, Wind Speed 1m/s

ELECTRICAL CHARACTERISTICS (Rear Power Gain)

5%	Maximum Power: Pmax[W]	451	456	462	467	472
	Module Efficiency: η [%]	22.6	22.8	23.1	23.4	23.6
15%	Maximum Power: Pmax[W]	494	500	506	511	517
	Module Efficiency: η [%]	24.7	25.0	25.3	25.6	25.9
25%	Maximum Power: Pmax[W]	537	543	550	556	562
	Module Efficiency: η [%]	26.9	27.2	27.5	27.8	28.1

TEMPERATURE PARAMETERS

Temperature Coefficient (Pmax)	-0.28%/°C
Temperature Coefficient (Voc)	-0.24%/°C
Temperature Coefficient (Isc)	+0.046%/°C
NMOT	45±2°C


MAXIMUM RATINGS

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30A
Power Output Tolerance	0~+3%
Bifaciality	80±10%


MECHANICAL PARAMETERS

Cells	TNC (N Type Monocrystalline Cell)
Cell Orientation	96[6×16]
Dimension	1762±2×1134±2×30mm
Weight	22.4kg
Front Glass	1.6mm high transmittance, AR tempered glass
Rear Glass	1.6mm semi-tempered glass
Frame	Anodized aluminum alloy black frame
Junction Box	IP68, 3 diodes
Output Cable	4.0mm ²
Cable Length	+1200mm, -1200mm, length can be customized
Wind/Snow Load	2400Pa/5400Pa
Packaging	36pcs per pallet, 936pcs per 40'HC

WARRANTY

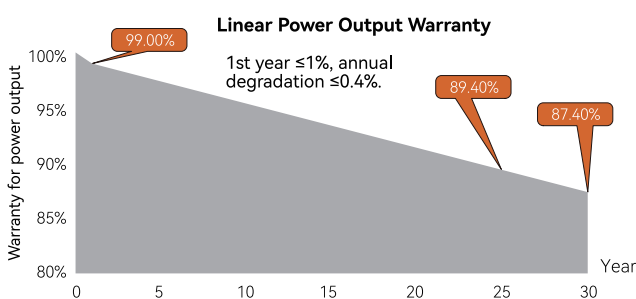

I-V CURVE

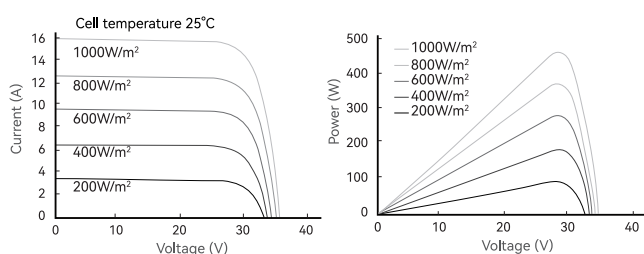

CERTIFICATIONS

Quality Management System and Product Certification

ISO 9001: 2015/Quality management system
 ISO 14001: 2015/Environmental management system
 ISO 45001: 2018/Occupation health safety management system
 ISO 50001: 2018/Energy management system
 IEC 62941: 2019/Quality system for PV module manufacturing
 IEC 61215/61730, IEC 62804(PID), IEC 61701(Salt),
 IEC 62716 (Ammonia), IEC 60068-2-68(Sand)

